

# 8762/3/4A, B, C Coaxial Switches

## High performance switches for microwave and RF instrumentation and systems

Keysight Technologies, Inc. offers a ver-satile line of multiport coaxial switches. These 50 $\Omega$  mechanical-latching switches come with the performance and reliability that you have come to expect in Keysight micro--wave accessories.

Offering excellent electrical and mechanical performance with broadband operation, high isolation, low SWR, long life, and exceptional repeatability, these switches are designed with your applications in mind. Frequency ranges are available to 4 GHz and 18 GHz for the A and B models with SMA connectors and to 26.5 GHz for the C models with APC-3.5 connectors.



The 8762A, 8762B, and 8762C (Figure 1) are single-pole double-throw switches with high isolation, > 100 dB at 4 GHz for the A model, > 90 dB at 18 GHz for the B model and > 50 dB at 26.5 GHz for the C model. All models terminate the unused port with 50Ω, a key feature for your applications where low SWR is required on all ports. The 8763A, 8763B, and 8763C (Figure 2) have 4 RF ports with one internal 50Ω termination designed for applications requiring a transfer switch or a cross switching element.

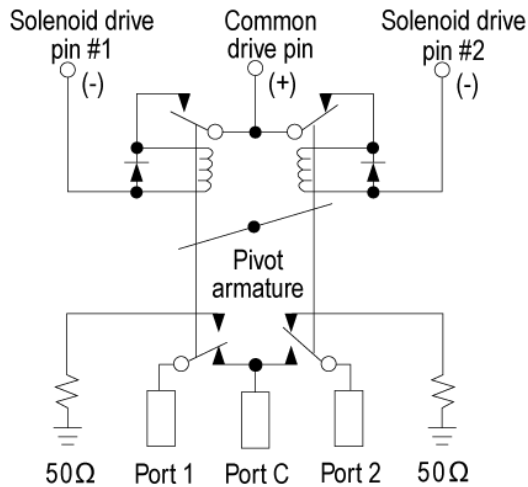


Figure 1. Keysight 8762

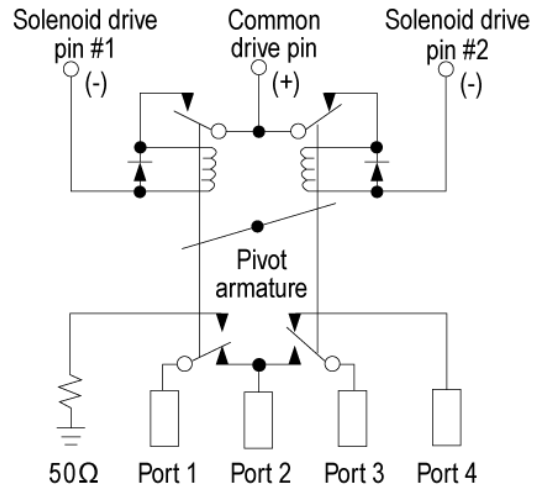


Figure 2. Keysight 8763

The 8764A, 8764B, and 8764C (Figure 3) round out the family with 5 RF ports, giving you flexibility to configure the switch for your specific needs.

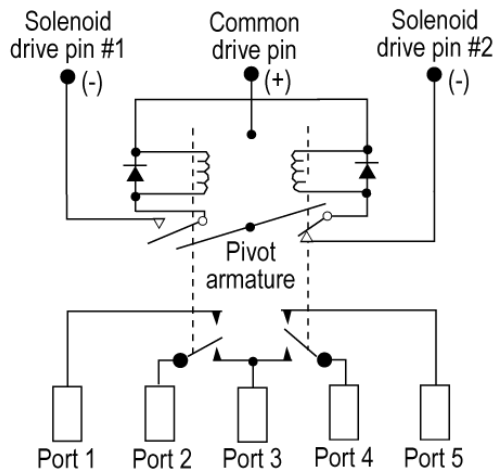


Figure 3. Keysight 8764

## Applications

### Multi-source switching

The 8762A, 8762B or 8762C is an excellent choice for applications where you require selection of multiple signal sources, frequency counters, or signal control devices such as modulators or filters, or routing signals from multiple sources as shown in Figure 4.

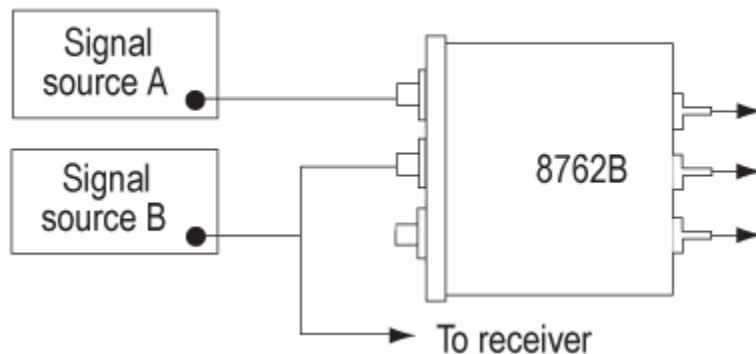


Figure 4. Multi-source switching

### Transfer switching

For applications requiring a “transfer switch,” as shown in Figure 5, an 8763A, B, or C is the ideal choice to insert a component, such as a filter or mixer, into a signal path. Another popular use is to switch between a device under test and a through path for system calibration. The 8763A,B,C's internal load can terminate the device under test when in the through mode (up to 1 watt).

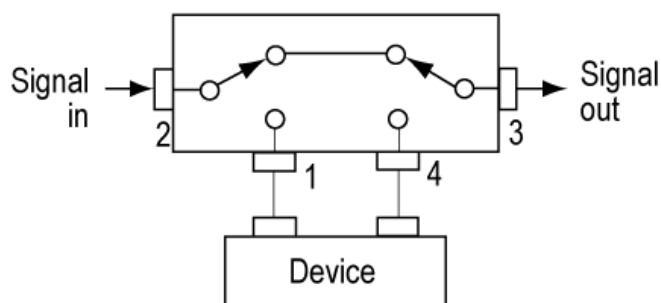


Figure 5. Keysight 8763 used as a transfer switch (equivalent circuit action)

## Reverse signal path

Figure 6 shows how an 8762 and 8764 may be used to provide a “transceiver” configuration. This example illustrates how one amplifier can be used to transmit or receive. Any application where the signal path direction needs to be reversed could use this configuration.

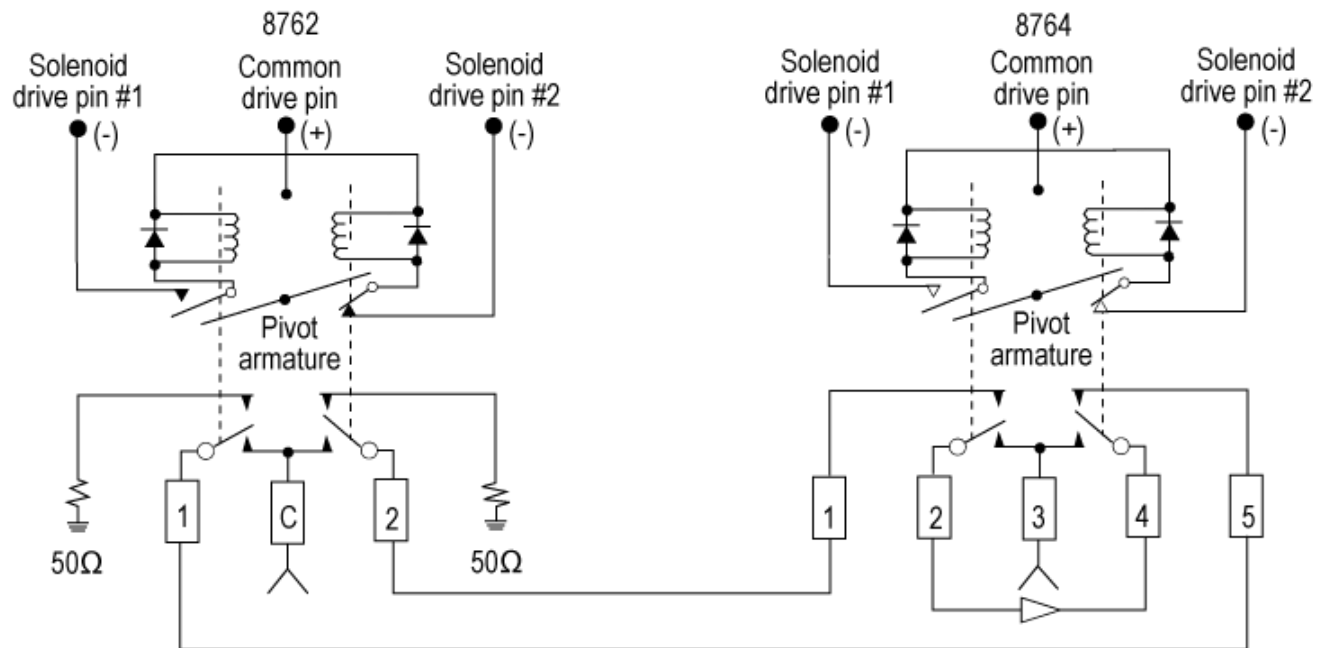


Figure 6. Signal reversal

## Portable and remote applications

Due to their small package size, light weight, low power consumption, and high reliability, these switches are ideal for your portable or remote applications. The light weight and repeatability make them well suited for portable spectrum analyzers and other portable microwave test equipment. Their 1,000,000 cycle life make them the ideal candidate for system design, such as communications repeaters or remote monitoring stations that demand minimal maintenance. The switch's automatic coil disconnect feature and low current drain during switching minimize the amount of power needed for operating the switches.

## Dedicated switching

For larger switching systems, where many switches will be used to provide complex signal routing, a switch driver such as the 87130A or 70611A is recommended. The 87130A rack-and-stack switch driver and the MMS-based 70611A are convenient, flexible interface bus (GPIB) or modular systems interface bus (MS-IB) switch controllers, providing driver circuitry, indicator readback circuitry and firmware that makes it easy to integrate switch components into a switching system. Controlling the 87130A is simple using either a PC or workstation based GPIB controller and Keysight Interactive Test Generator (Keysight-ITG) or Keysight Visual Engineering Environment (Keysight VEE). The 70611A gives manual control via the MMS user interface or can also be controlled via an GPIB equipped PC or workstation.

In addition, the built-in firmware makes it possible to define often used switch paths. With the path command, macros can be designed which open and close the right solenoids to select the desired switch port, and the path may be given a meaningful name. Remember that only one select pin should be activated at one time to prevent rapid cycling of the switch.

Both the 87130A and 70611A provide position monitoring and reporting, which make it possible for a program to determine if all the switches are in their proper state (position) before the program continues with testing. A programmable wake up condition makes it possible to ensure that the matrix or switching system starts up in a predetermined state, to prevent damage to delicate equipment from excessive power. This would also be the state that the system returns to after a power interruption.

Accessory cables and adapters make it easy to quickly get the 8762/3/4 working with the 87130A or 70611A. Reference literature number 5963-2038E, *Switch Attenuator Driver Configuration Guide*.

For smaller switching needs, the 11713B/C attenuator/switch controller provides simple GPIB control for up to ten 8762/3/4 switches. Connecting cables can be ordered which make it easy to connect the switches to the 11713B/C. Refer to literature number 5958-7277EN, *Keysight 11713B/C Attenuator/Switch Drivers Configuration Guide*.

## Operation and use

### How the switch works

All the switches are “break before make;” the switched ports are not connected to each other preventing possible damage to sensitive circuits. The standard configuration switch uses 24 Vdc for the switching voltage, Option 876xx-0111 specifies a voltage of 5 Vdc, and Option 876xx-015 specifies 15 Vdc. Options 876xx-T15 and 876xx-T24 are TTL/5V CMOS compatible with 15 Vdc and 24 Vdc drive respectively.

### Driving the switch


For standard, Options 876xx-011 and 876xx-015 switches, switching is accomplished by applying the supply voltage to pin “C” and grounding the appropriate pin to actuate the switching mechanism.


**Avoid grounding both RF path select pins as rapid cycling may occur.** After the switch is fully latched (30 ms), the drive current is automatically disconnected. If the drive circuit is pulsed, the pulse duration must be at least 30 ms to ensure that the switch will fully latch. For TTL/5 volt CMOS compatible drive (Options 876xx-T24 and 876xx-T15), apply the supply voltage to pin “C,” and ground to pin #1. Switch positions by applying a TTL “high” or TTL “low” to pin #2 as needed. See Table 1.

### Remote indication (TTL options excluded)

The position of the switch may be determined by utilizing the open and closed states of the internal coil contacts. Figure 7 displays two indicator circuits, one to provide a TTL output and one that directly activates an LED. The circuits will output a TTL “HI” and LED “on” if the switch is in the state shown in Figure 7. When drive pin 1 contact is closed (as shown), RF port 2 is connected to common port. For the Keysight 8763/4, see Figures 2, 3, and Table 1 for corresponding RF port connections. The circuits shown are designed to operate with coil voltage of 24 V. If other voltage switches are used, the circuit components must be modified to accommodate that voltage.

Since current is drawn through the solenoid for these indicator circuits, inadvertent switching is prevented by limiting the current to 5 mA. Additional design information may be required from the component manufacturer for the circuits described in Figure 7, depending upon specific applications.

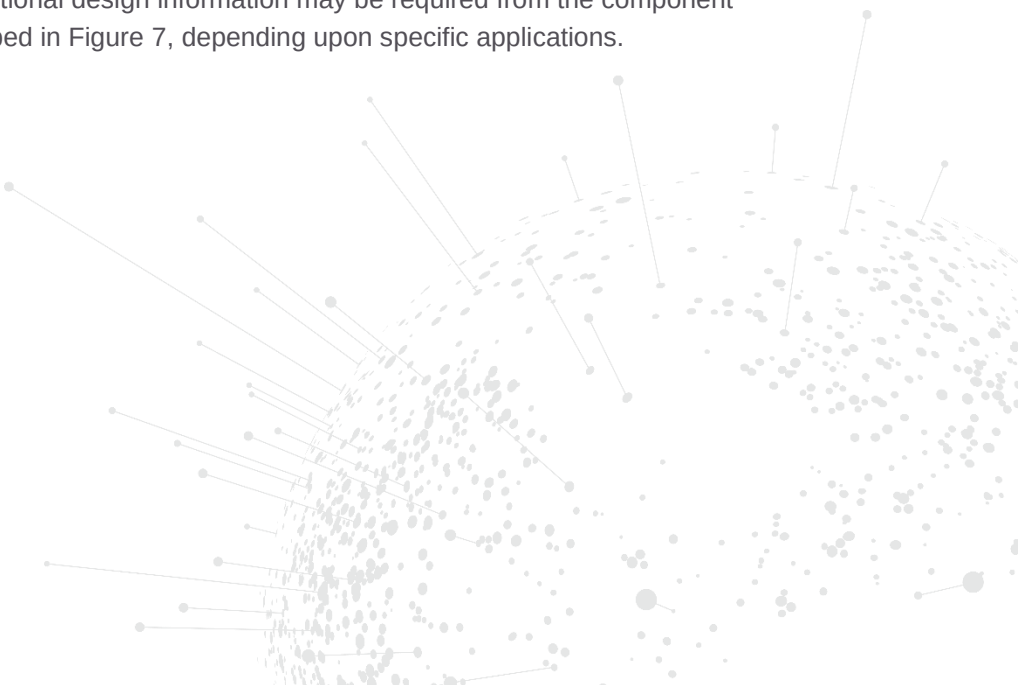

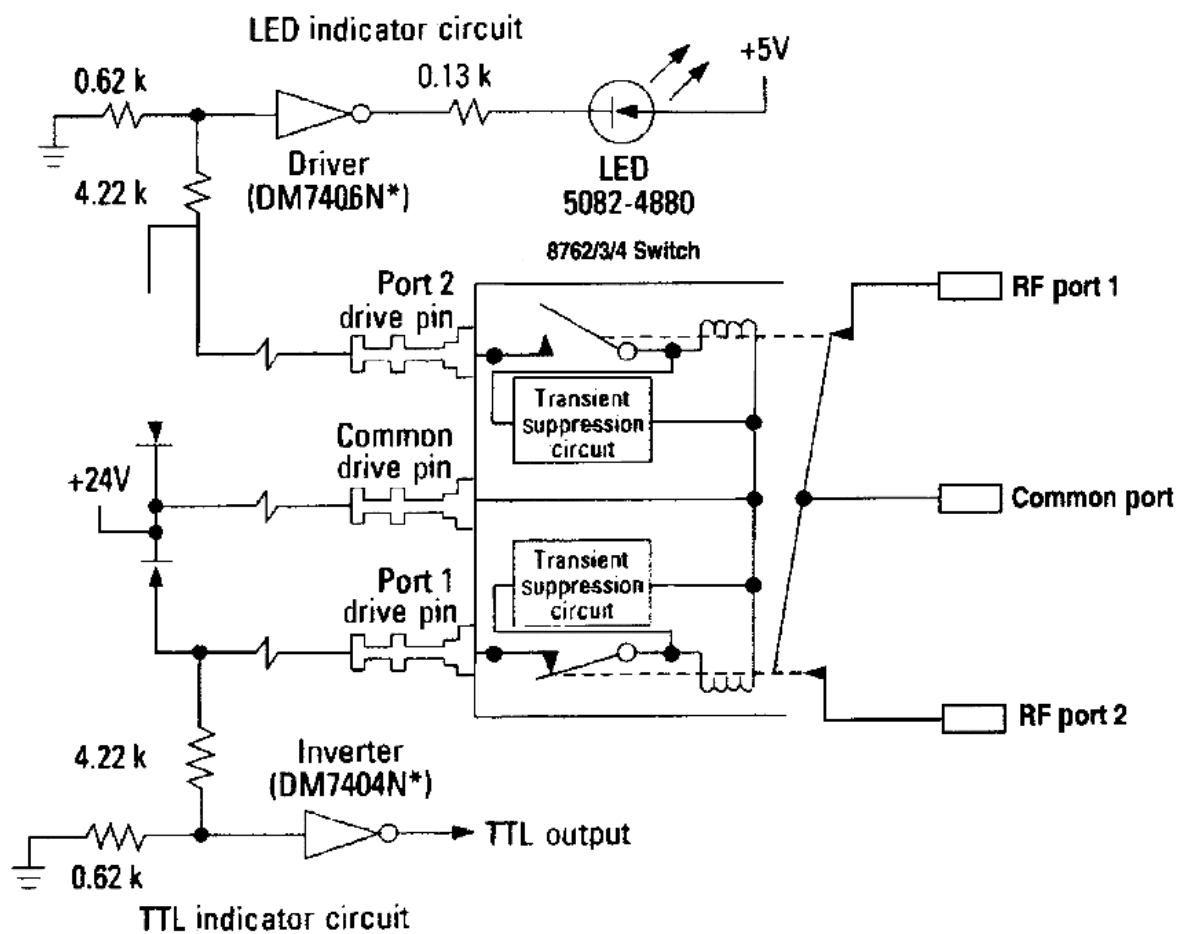

\* National Semiconductor part numbers,  
also supplied by other vendors.

Figure 7. TTL and LED remote indicator circuits

Keysight assumes no responsibility for use of any circuits described herein, and makes no representations or warranties, expressed or implied, that such circuits are free from patent infringements.

**Table 1. Switching logic table**

|              | Standard drive |        | TTL drive <sup>1</sup> |                                          |
|--------------|----------------|--------|------------------------|------------------------------------------|
| Model number | Pin 1          | Pin 2  | Pin 2 <sup>2</sup>     | RF path                                  |
| 8762A/B/C    | Ground         | Open   | TTL high               | 1 to C closed<br>2 terminated            |
|              | Open           | Ground | TTL low                | 2 to C closed<br>1 terminated            |
| 8763A/B/C    | Ground         | Open   | TTL high               | 1 to 2 closed<br>3 to 4 closed           |
|              | Open           | Ground | TTL low                | 1 terminated<br>2 to 3 closed<br>4 Open  |
| 8764A/B/C    | Ground         | Open   | TTL high               | 1 Open<br>2 to 3 closed<br>4 to 5 closed |
|              | Open           | Ground | TTL low                | 1 to 2 closed<br>3 to 4 closed<br>5 Open |

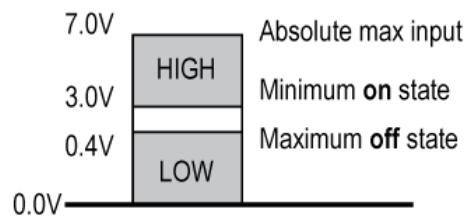


Figure 7. Control voltage states



## Specifications

| Keysight model numbers                                                                                       | 8762A, 8763A, 8764A                             | 8762B, 8763B, 8764B                                                    | 8762C, 8763C, 8764C                                                                              |
|--------------------------------------------------------------------------------------------------------------|-------------------------------------------------|------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|
| Frequency range                                                                                              | dc to 4 GHz                                     | dc to 18 GHz                                                           | dc to 26.5 GHz                                                                                   |
| Insertion loss                                                                                               | < 0.20 dB, dc to 2 GHz<br>< 0.25 dB, 2 to 4 GHz | < 0.20 dB, dc to 2 GHz<br>< 0.50 dB, 2 to 18 GHz                       | < 0.25 dB, dc to 2 GHz<br>< 0.50 dB, 2 to 18 GHz<br>< 1.25 dB, 18 to 26.5 GHz                    |
| Isolation between ports                                                                                      | > 100 dB, dc to 4 GHz                           | > 90 dB, dc to 18 GHz                                                  | > 90 dB, dc to 18 GHz<br>> 50 dB, 18 to 26.5 GHz                                                 |
| SWR through line                                                                                             | < 1.10, dc to 2 GHz<br>< 1.20, 2 to 4 GHz       | < 1.10, dc to 2 GHz<br>< 1.20, 2 to 12.4 GHz<br>< 1.30, 12.4 to 18 GHz | < 1.15, dc to 2 GHz<br>< 1.25, 2 to 12.4 GHz<br>< 1.40, 12.4 to 18 GHz<br>< 1.80, 18 to 26.5 GHz |
| Into internal 50Ω load<br>(8762s and 8763s)                                                                  | < 1.10, dc to 2 GHz<br>< 1.20, 2 to 4 GHz       | < 1.10, dc to 2 GHz<br>< 1.20, 2 to 12.4 GHz                           | < 1.15, dc to 2 GHz<br>< 1.25, 2 to 12.4 GHz<br>< 1.30, 12.4 to 18 GHz<br>< 1.80, 18 to 26.5 GHz |
| Connectors                                                                                                   | SMA (f)                                         | SMA (f)                                                                | 3.5 mm (f)                                                                                       |
| Insertion loss repeatability<br>dc to 18 GHz 18 to 26.5<br>GHz (Up to 1,000,000<br>cycles measured at 25 °C) | 0.03 dB typical                                 | 0.03 dB typical                                                        | 0.03 dB typical<br>0.05 dB typical                                                               |

## General operating data

|                      |                                                                             |
|----------------------|-----------------------------------------------------------------------------|
| Maximum power rating | 1 watt average; 100 watts peak (not to exceed average power rating); +7 Vdc |
| Life                 | 1,000,000 cycles typical                                                    |
| Switching solenoid   | Switching speed 30 ms maximum                                               |

## Switch drive data

| Parameter                              | Test conditions                                               | Minimum | Nominal | Maximum | Units   |
|----------------------------------------|---------------------------------------------------------------|---------|---------|---------|---------|
| <b>Supply voltage</b>                  |                                                               |         |         |         |         |
| Option 876xx-024 or 876xx-T24          |                                                               |         |         |         |         |
| Options 876xx-015/876xx-T15            |                                                               | 20      | 24      | 32      | V       |
| Option 876xx-011                       |                                                               | 12      | 15      | 20      | V       |
|                                        |                                                               | 4.5     | 5       | 7       | v       |
| <b>Supply current</b>                  |                                                               |         |         |         |         |
|                                        | <b>Switching; pulse width <math>\geq 30</math> ms maximum</b> |         |         |         |         |
| Option 876xx-024 or 876xx-T24          | @ Vcc = 24 Vdc                                                |         | 120     |         | mA      |
| Options 876xx-015/876xx-T15            | @ Vcc = 15 Vdc                                                |         | 182     |         | mA      |
| Option 876xx-011                       | @ Vcc = 5 Vdc                                                 |         | 400     |         | mA      |
| <b>Impedance</b>                       |                                                               |         |         |         |         |
| Option 876xx-024 or 876xx-T24          |                                                               |         | 200     |         | Ohm     |
|                                        |                                                               |         | 127     |         | mH      |
| Option 876xx-015, Option 876xx-T15     |                                                               |         | 82      |         | Ohm     |
|                                        |                                                               |         | 57      |         | mH      |
| Option 876xx-011                       |                                                               |         | 13      |         | Ohm     |
|                                        |                                                               |         | 8       |         | mH      |
| <b>Options 876xx-T15 and 876xx-T24</b> |                                                               |         |         |         |         |
| High-level input                       |                                                               | 3       |         |         | V       |
| Low-level input                        |                                                               |         | 0.4     |         | V       |
| Max high input current                 | Vcc = Max                                                     |         | 300     |         | $\mu$ A |
|                                        | V <sub>input</sub> = 7.0 Vdc                                  |         |         |         |         |
| Supply current (quiescent)             | V <sub>input</sub> = 0.0                                      |         | 2.0     |         | mA      |
|                                        | V <sub>input</sub> = 7.0                                      |         | 50      |         | $\mu$ A |


## Environmental

|                                        |                                     |                                    |                          |
|----------------------------------------|-------------------------------------|------------------------------------|--------------------------|
| Operating temperature<br>–25 to +75 °C | Humidity<br>99% RH, 40°C,<br>5 days | Vibration<br>0.05",<br>10 to 55 Hz | Shock<br>50 g's,<br>3 ms |
|----------------------------------------|-------------------------------------|------------------------------------|--------------------------|

## Physical specifications

|            |               |
|------------|---------------|
| Dimensions | Per Figure 9  |
| Weight     | 245 g (9 oz.) |

## Keysight 8762 Series

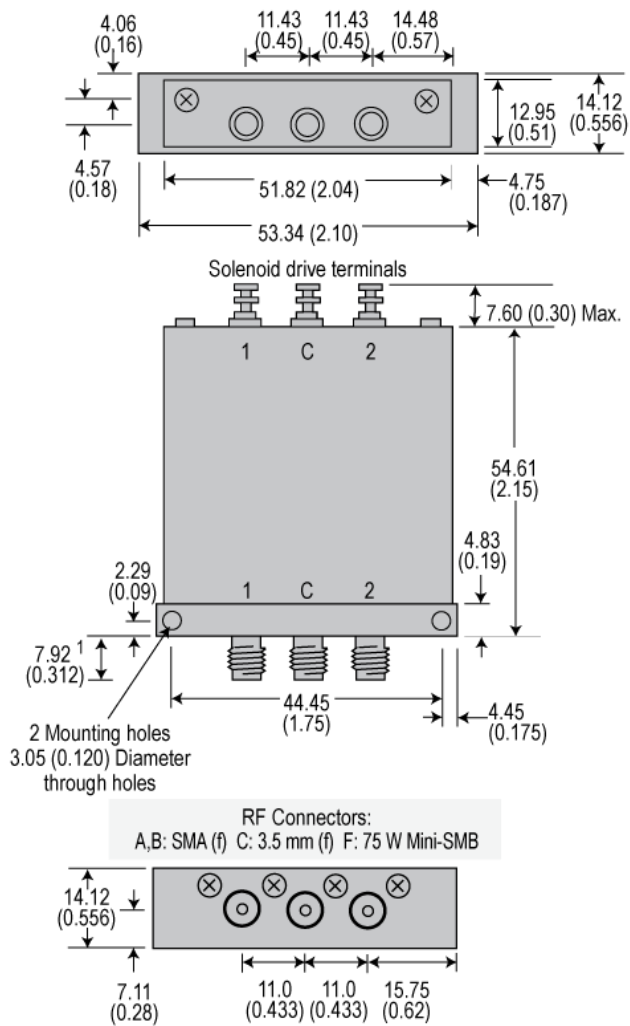

## Keysight 8763/64 Series

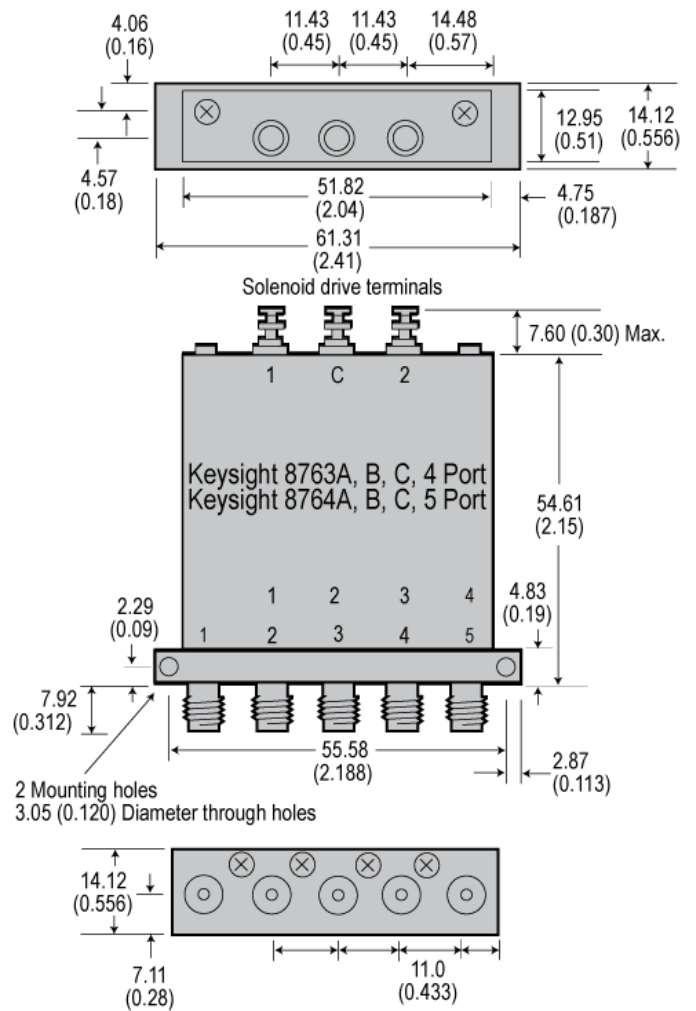


Figure 9. Product outlines

## Ordering Information

| Model no. | Frequency range    | Option                                                        |
|-----------|--------------------|---------------------------------------------------------------|
| 8762A/B/C | A models: 4 GHz    | Option 011: 5 Vdc                                             |
| 8763A/B/C | B models: 18 GHz   | Option 015: 15 Vdc                                            |
| 8764A/B/C | C models: 26.5 GHz | Option 024: 24 Vdc                                            |
|           |                    | Option T15: TTL/5V CMOS compatible with 15 Vdc supply         |
|           |                    | Option T24: TTL/5V CMOS compatible with 24 Vdc supply         |
|           |                    | Option UK6: Commercial calibration test data with certificate |

## Related Literature

Keysight RF and Microwave Switch Selection Guide, literature number [5989-6031EN](#)

Learn more at: [www.keysight.com](http://www.keysight.com)

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

