


Keysight Technologies

8490G Coaxial Attenuators

Technical Overview





Introduction

Key Specifications

- Maximize your operating frequency range for DC to 67 GHz application
- Minimize your measurement uncertainty with low SWR of 1.45 up to 67 GHz
- Improve your measurement confidence with excellent attenuation accuracy

The Keysight Technologies, Inc. 8490G family is a line of precision fixed coaxial attenuators with performance specified up to 67 GHz. These attenuators use the 1.85 mm coaxial connector, and exhibit excellent SWR and accuracy performance from DC to 67 GHz. The 8490G family has attenuation values of 3, 6, 10, 20, 30 and 40 dB.

The Keysight 8490G family of 1.85 mm fixed coaxial connectors are assembled and tested with the same meticulous care as their lower frequency counterparts: the Keysight 8490D, 8491 and 8493 families. These attenuators are tested on Keysight precision Network Analyzers to assure full specifications over their entire frequency range.

Applications

Ruggedness, reliability and small size make these attenuators suitable for use on bench as well as on system level. With their accuracy and low SWR, they are ideally suited for extending the range of sensitive power meters for high power measurements. The same characteristics lend themselves to applications such as calibration standards and RF substitution measurements.

With their broad DC to 67 GHz frequency range and reasonable cost, general applications such as the reduction of power level to sensitive components and instrumentation systems are attractive and appropriate uses for these attenuators.

Specifications

Specifications describe the instrument’s warranted performance over the temperature range 0° C to +55° C (except where noted). Supplemental and typical characteristics are intended to provide typical but non-warranted performance parameters. These are denoted as “typical”, “nominal” or “approximate”.

Frequency range	DC to 67 GHz
Impedance	(nominal) 50 Ω
Connectors	1.85 mm
Power	(maximum) 1 W average

Options	Attenuation (dB) = Insertion Loss				Atten. Data Uncert. (dB)
	Min (GHz) 0 to 67	Max (GHz) 0 to 26.5	Max (GHz) 26.5 to 50	Max (GHz) 50 to 67	Max (GHz) 0.4 to 67
8490G 003	2.5	3.9	4.4	4.8	±0.3
8490G 006	5.4	6.9	7.4	7.8	±0.3
8490G 010	9.4	10.9	11.1	11.3	±0.3
8490G 020	19.2	21.3	21.5	21.7	±0.3
8490G 030	29.2	31.3	31.5	31.7	±0.3
8490G 040	38.0	42.5	42.5	42.5	±0.6

Options	SWR (Maximum)			Return Loss (dB)		
	(GHz) 0 to 26.5	(GHz) 26.5 to 50	(GHz) 50 to 67	(GHz) 0 to 26.5	(GHz) 26.5 to 50	(GHz) 50 to 67
8490G 003	1.15	1.25	1.45	23.1	19.1	14.7
8490G 006	1.15	1.25	1.45	23.1	19.1	14.7
8490G 010	1.15	1.25	1.45	23.1	19.1	14.7
8490G 020	1.15	1.25	1.45	23.1	19.1	14.7
8490G 030	1.15	1.25	1.45	23.1	19.1	14.7
8490G 040	1.10	1.15	1.25	26.4	23.1	19.1

Environmental Specifications

The 8490G is designed to fully comply with Keysights’ product operating environment specifications. The following summarizes the environmental specifications for these products.

Temperature	
Operating	0° C to +55° C
Non-operating	–55° C to +85° C
Cycling	–65° C to +120° C, 10 cycles @ 20° C per minute, 20 minutes dwell time per MIL-STD-833F, Method 1010.8, Condition C (modified)

Humidity	
Operating	50% to 95% RH @ 40° C, 24 hour cycling, 5 times.


Shock	
Half-sine, smoothed	1000 G @ 0.5 ms, 3 shock pulses per orientation 18 total per MIL-STD-833F, Method 2002,4, Condition B (modified)

Vibration	
Broadband random	50 to 2000 Hz, 7.0 G rms, 15 minutes, per MIL-STD-833F, Method 2026-1 (modified)

Altitude	
Operating	< 4,600 meters (15,000 feet)
Storage	< 15,300 meters (50,000 feet)

Mechanical Dimension

Net weight	
	7.2 g (0.0158 lb) 3, 6, 10, 20 dB
	7.5 g (0.0165 lb) 30, 40 dB

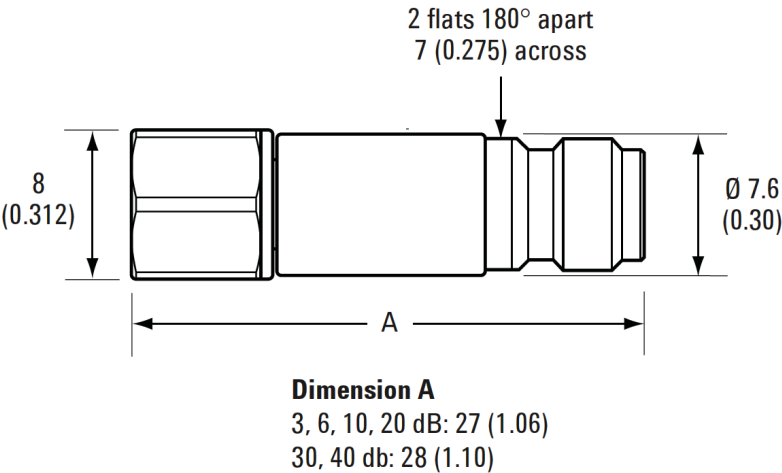

All dimensions are in millimeters (inches)

Figure 1. 8490G product outline

Supplement
Characteristics
(typical)

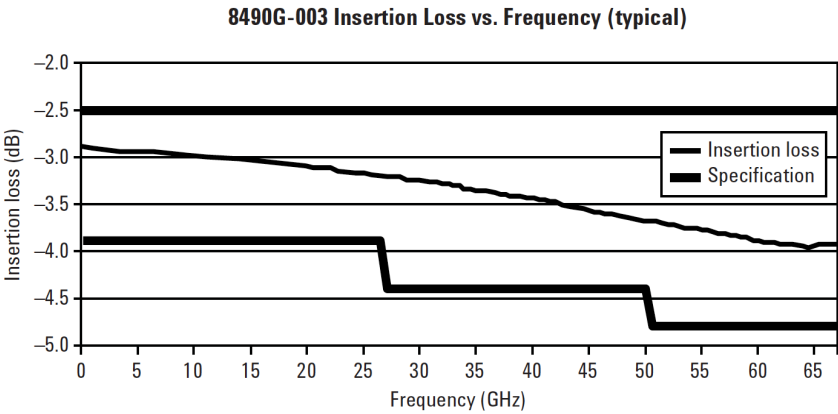


Figure 2. 8490G-003 typical insertion loss versus frequency

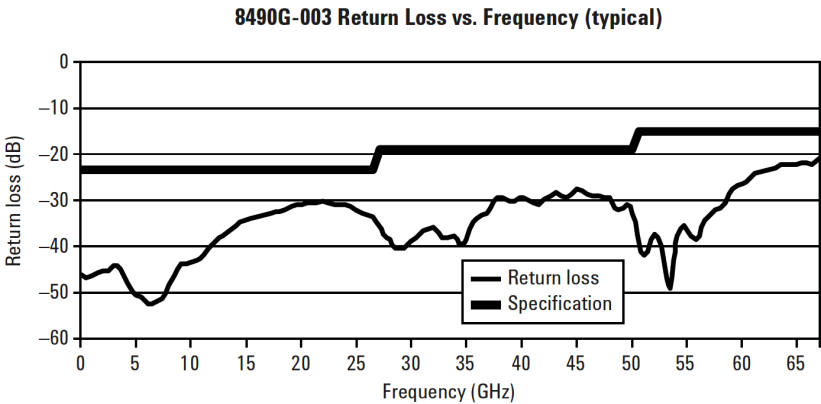


Figure 3. 8490G-003 typical return loss versus frequency

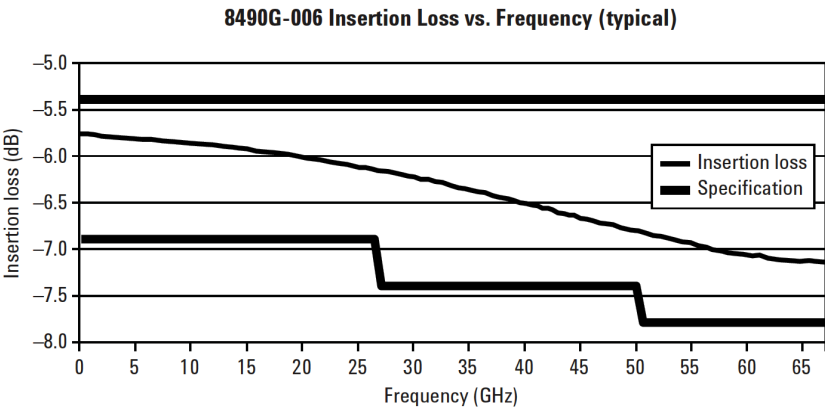


Figure 4. 8490G-006 typical insertion loss versus frequency

Supplement
Characteristics
(typical)
—continued

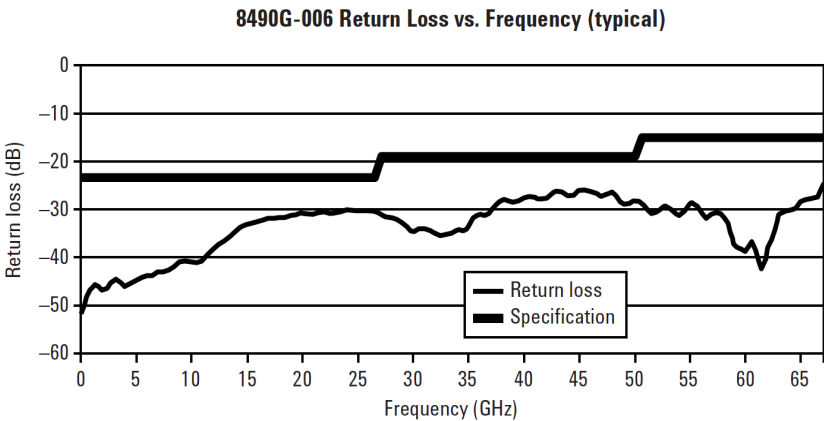


Figure 5. 8490G-006 typical return loss versus frequency

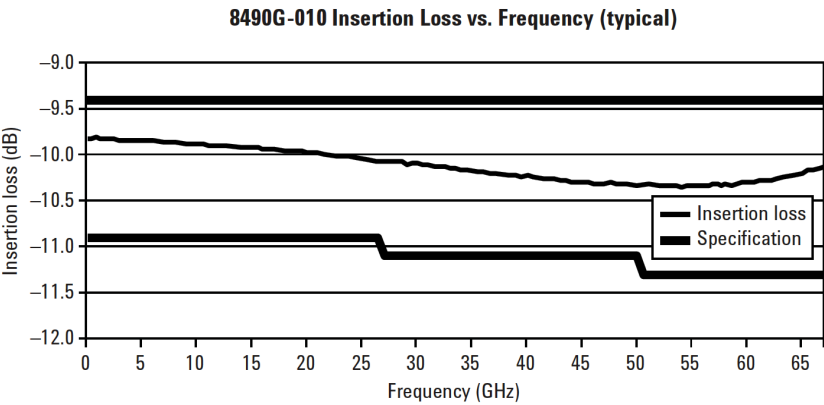


Figure 6. 8490G-010 typical insertion loss versus frequency

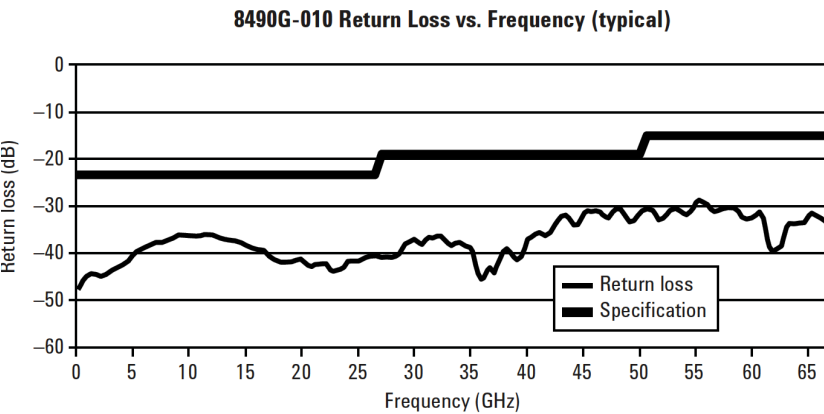


Figure 7. 8490G-010 typical return loss versus frequency

Supplement
Characteristics
(typical)
—continued

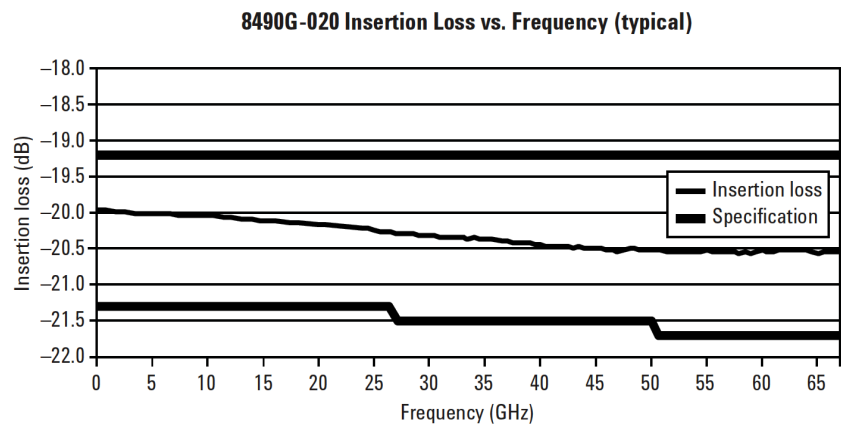


Figure 8. 8490G-020 typical insertion loss versus frequency

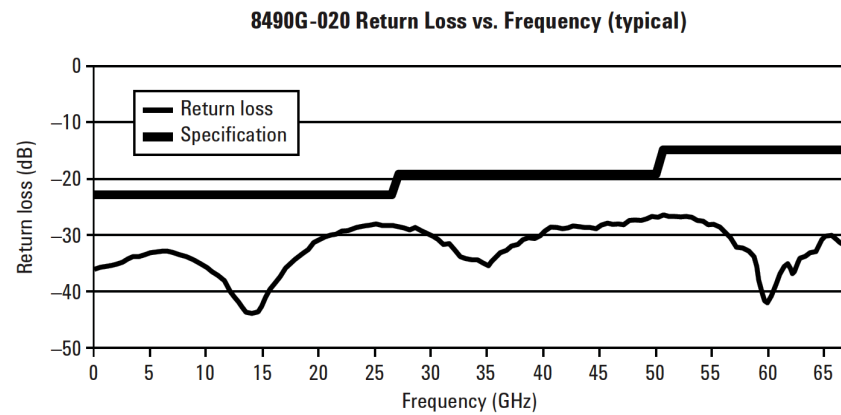


Figure 9. 8490G-020 typical return loss versus frequency

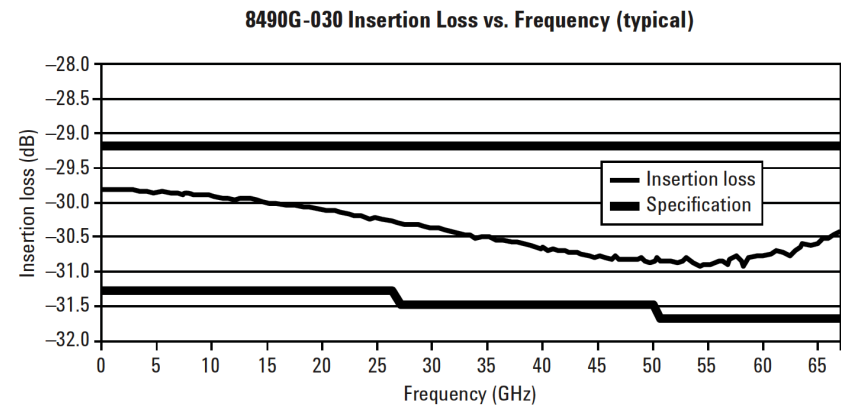


Figure 10. 8490G-030 typical insertion loss versus frequency

Supplement
Characteristics
(typical)
—continued

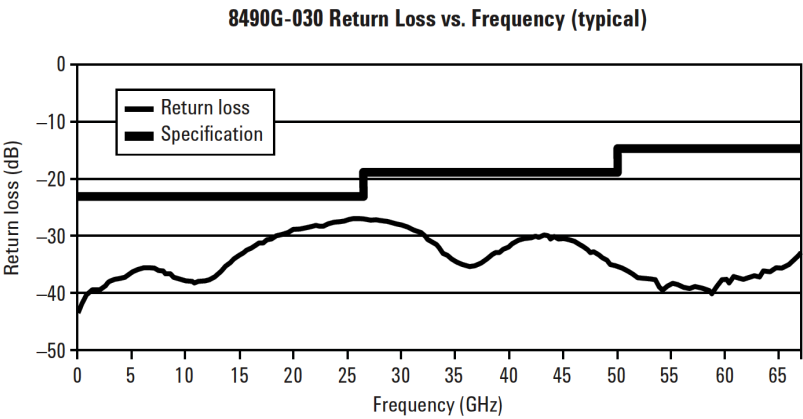


Figure 11. 8490G-030 typical return loss versus frequency

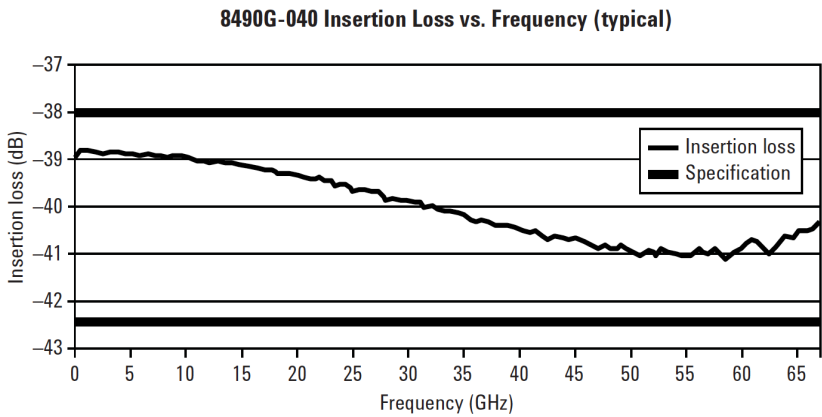


Figure 12. 8490G-040 typical insertion loss versus frequency

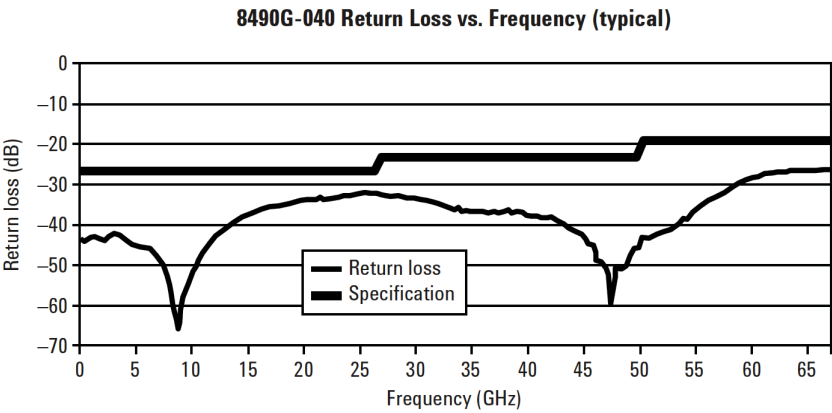


Figure 13. 8490G-040 typical return loss versus frequency

Ordering Information

Coaxial attenuator

8490G DC to 67 GHz, 1.85 mm coaxial connector

Attenuation option (must choose one)

8490G-003	3 dB attenuation
8490G-006	6 dB attenuation
8490G-010	10 dB attenuation
8490G-020	20 dB attenuation
8490G-030	30 dB attenuation
8490G-040	40 dB attenuation

Calibration Documentation (optional)

8490G-UK6	calibration data
-----------	------------------


Web Resource

www.keysight.com/find/mta

Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology.

From Hewlett-Packard to Agilent to Keysight.

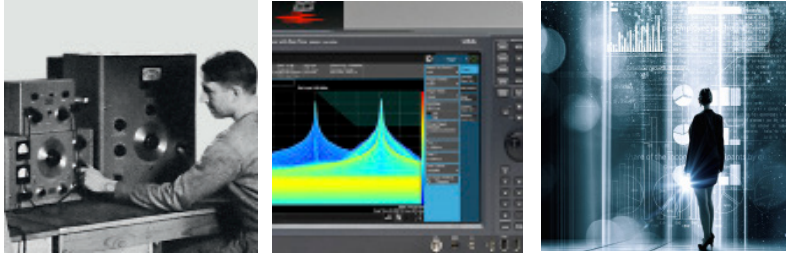

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

www.keysight.com/find/emt_product_registration

Register your products to get up-to-date product information and find warranty information.

KEYSIGHT SERVICES

*Accelerate Technology Adoption.
Lower costs.*

Keysight Services

www.keysight.com/find/service

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

www.keysight.com/find/mta

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at:

www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:

www.keysight.com/find/contactus
(BP-9-7-17)



www.keysight.com/go/quality

Keysight Technologies, Inc.
DEKRA Certified ISO 9001:2015
Quality Management System

